




HIGHLIGHTS

- 40 tons evenly distributed
- Mechanical removable gooseneck with fifth wheel guide rollers
- Combination figure-8 plate provides either 50" or 52" loaded fifth wheel height
- 81" swing radius for easy maneuverability
- 18" loaded deck height
- 6" ground clearance
- 29' 0" clear deck length—use every inch
- Air-ride suspension with automatic controls
- FA54 flip axle ready



RENEGADETM18

**Double Drop • Mechanical Detachable Gooseneck
Flat Level Deck • Fixed Tandem Bogie**

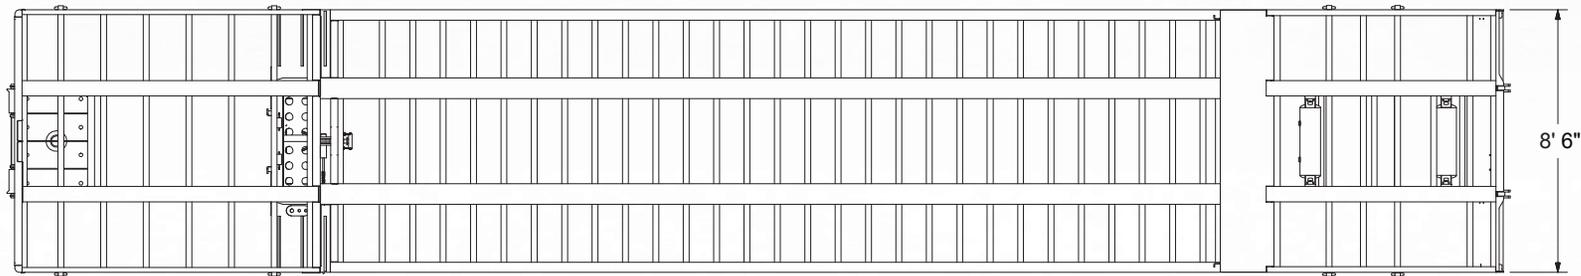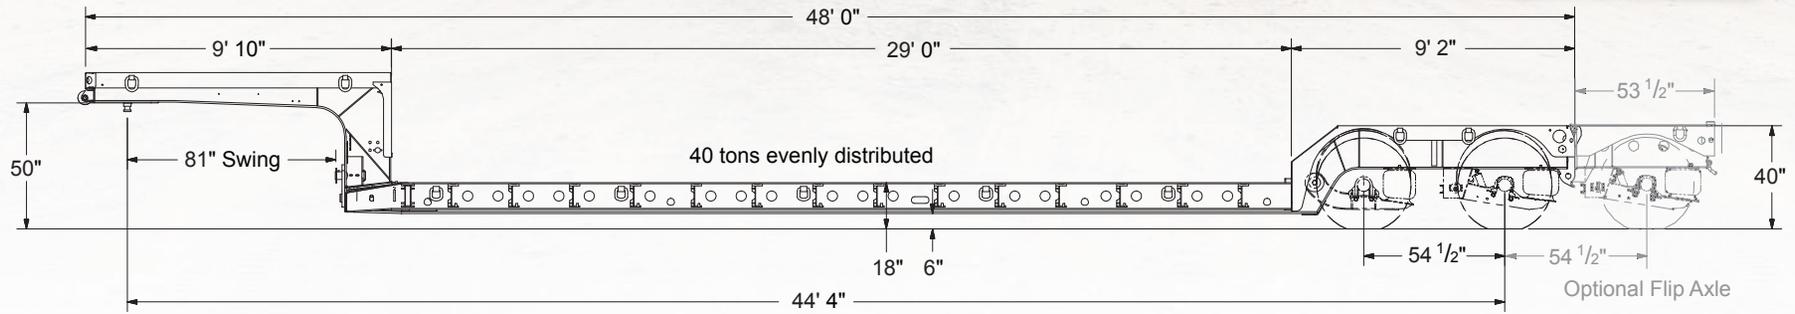

Fontaine Specialized • 5398 US Highway 11 • Springville, AL 35146 • 205-467-6171 • www.fontainespecialized.com

Specifications subject to change without notice.
Photos may show some optional equipment.

A Marmon | Berkshire Hathaway Company

©2023 Fontaine Specialized • LT-148 R5



Renegade 18

Double Drop • Mechanical Gooseneck • Flat Level Deck • Fixed Tandem Bogie

RENEGADETM18

Double drop trailers built to take it!



Figure 8 plate (also known as "lock rings" or "swinging tear-drops") features options for 50" or 52" loaded fifth wheel height.



Standard liquid-filled air gauge helps you position the load quickly, easily and accurately.



Low profile connections for optional 3rd axle give you even greater hauling versatility.

Standard Features and Specifications

Capacity

- 40 tons evenly distributed (GAWR and tire ratings determine legal payloads)

Foundation

- All main longitudinal members fabricated with 100,000# minimum yield steel flanges and 50,000# webs

Gooseneck

- Mechanical removable gooseneck with fifth wheel guide rollers
- Combination figure-8 plate provides either 50" or 52" loaded fifth wheel height
- 81" swing radius for easy maneuverability (optional 36" flip box achieves 117" swing radius)
- J560 7-pin electrical receptacle

Deck

- Flat level deck 8' 6" overall width
- 29' 0" clear deck length lets you handle bigger loads for greater hauling versatility
- 18" loaded deck height with 6" ground clearance
- Sloped front ramp features traction cleats for easier loading and unloading
- Crossmembers on 12" centers for greater strength
- Full width 1 3/8" nominal apitong flooring for durability
- 28 swing-out extension brackets provide greater width for even more versatility (14 on each side)
- 2 heavy-duty removable hook-on extension brackets at front of deck (1 on each side)

Bogie

- Fixed deck-to-bogie connection with full-width steel bogie ramp for easy equipment loading
- Covered rear bogie platform with 1 1/8" apitong or equivalent flooring
- 2 heavy-duty tapered spindle axles with 54 1/2" spread
- 25,000 lbs capacity per axle (NOTE: GAWR determined by suspension type, brakes, tires and other components)
- Unitized air-ride suspension with automatic controls

Bogie (continued)

- Suspension mount is engineered, reinforced and braced to virtually eliminate frame cracking
- ABS (Anti lock Brake System) 4S/2M wired to center pin of 7-way socket with electronic sensors at every wheel end to virtually eliminate tire flat-spotting
- Spring brakes: 16.5" x 7" with 5.5" autoslacks to maintain positive braking action, quick change replacement feature saves repair time
- Hubs: Hub-piloted 10-stud mount for increased capacity and durability, heavy-duty outboard cast drums save time and cost on brake repairs
- Wheels: 8.25 x 22.5 steel disc, hub-piloted
- Tires: 255/70R 22.5 H ply OEM Standard
- Dimensions: Bogie height 40.0", Bogie width: 8' 6"
- Air/electrical connections in place for 3rd axle

Electrical

- Sealed harness for maximum corrosion resistance
- DOT sealed beams with LED lights on gooseneck, deck and bogie, 7 marker lights per side including mid turn signal and 3 tail lights per side
- 4" flush mounted center flashing amber strobes with battery back-up to operate disconnected from tractor

Securement

- 18 total D-Rings, 9 pairs bent type for longer chain life and better securement
- 4 flag holders (2 at front of deck and 2 at rear bumper)

Protective Coating

- High quality 2-part polyurethane enamel fights corrosion to extend service life
- Shot blasted and cleaned prior to painting
- Primed for better paint adhesion

Accent package

- Stainless steel bumper insert
- Aluminum fenders at rear of gooseneck

Weight

- From 16,140 lbs ± 3%

Options

- Lockable toolbox in riser portion of gooseneck between mainbeams
- 8 pair of D-rings recess mounted in floor (inboard of outside beams)
- Mini boom trough and traction cleats installed on sloped bogie ramp
- Dust shields on all axles
- Wheels: 8.25 x 22.5 LvL with One buffed outside/steel inside-hub-piloted or with all LvL One buffed wheels
- FA54 Flip Axle: 3rd axle with all steel disc wheels or LvL One buffed outside/steel disc inside or with all LvL One buffed wheels
- Load scales
- Tire inflation systems
- Custom paint

Consult your local Fontaine Specialized dealer to configure a trailer matched to your special requirements!